

KFL-11P

Visual Fault Locator (Pen type)



Key Features

- Bright red laser at 650nm
- Pulsed and CW operation
- Outpower: 1mw,10mw,20mw,30mw
- 2.5mm universal connector
- 30 hours of operation(1mW)
- Pocket size design
- 1.25 mm adapter for LC (optional)

Support all fiber optic connectors



ST



FC



SC




LC (optional)

PRODUCT SPECIFICATION:

Model	KFL-11P			
output power	1mW	10mW	20mW	30mW
Output wavelength	650nm			
Laser type	FP-LD			
2Hz	Yes			
Connector type	2.5mm universal for FC,SC,ST			
working temperature	-20~50°C			
Storage temperature	-20~50°C			
Battery	AA*2			
weight	80g			
Shape size	180*24mm			

TESTING EFFECT:

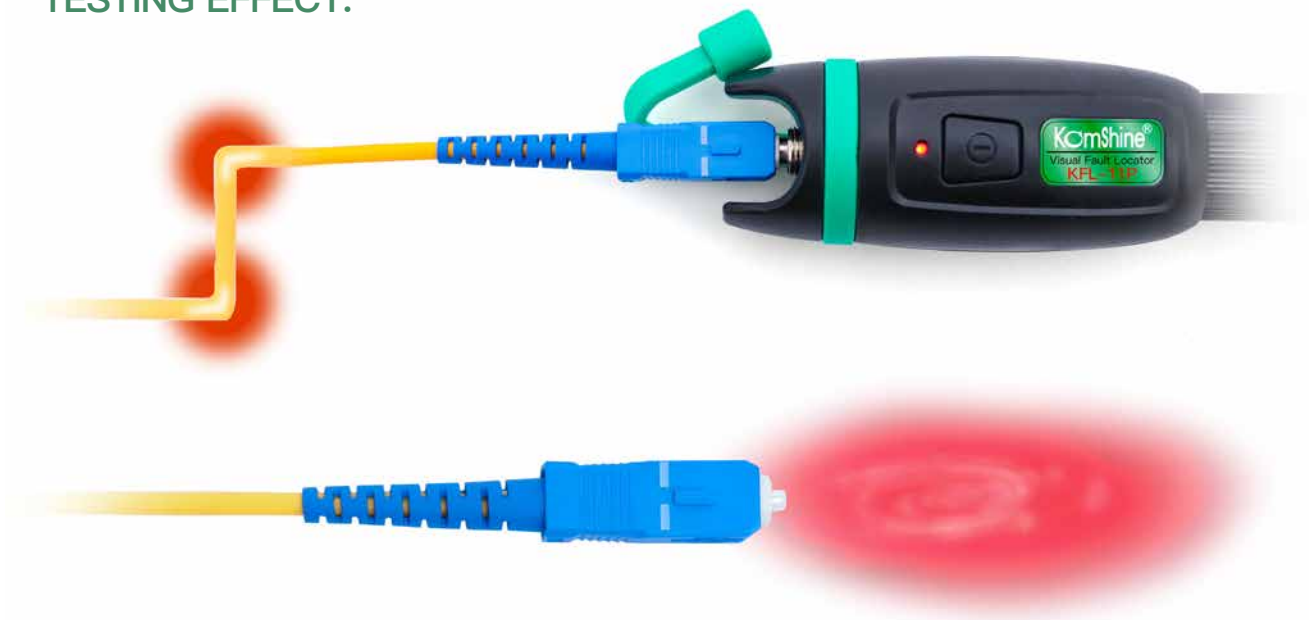

STANDARD PACKAGE:



CONTACT US:

KomShine Technologies Limited

HEAD OFFICE:

2F Building#2 Huashen Technology Park, Yuhua district Nanjing, JS,
210001, P.R. China

TEL: +86 (25) 5287 3711

FAX: +86 (25) 5287 3711

www.komshine.com

sales@komshine.com

- * Komshine reserves the right to improve, enhance, or modify the features and specifications of KomShine products without prior notification.
- * Company and product names appearing in this catalogue are registered marks or trademarks of respective companies.
- * This catalogue is printed using environmentally friendly paper and ink.